



Model 5062 Shown in White with Everbrass (PVD) Trim and Optional Fill Spout

The Covington™ whirlpool provides distinctive styling with the ultimate in hydro-therapy options. This corner whirlpool features a seating area and optional fill spout providing the best in comfort and convenience. With a sixteen jet system, four stacked directional lumbar back jets and two spinning lumbar back jets at each end, plus four micro directional side jets give the bather(s), the best in hydro-therapy flexibility.

## Features

- 60" x 60" x 22" Corner Whirlpool
- Luxury Package: SimpleSelect™, Four Button Control, Ten-Speed Pump with Massage Mode, In-Line Heater and MoodScape™ Light
- Six Stacked Lumbar Back Jets at Each End for the Bather(s) to Enjoy an Invigorating Back Hydro-Massage
- Two Lower Spinning Lumbar Jets at Each End for a Concentrated Lower Back Hydro-Massage
- Four Micro Directional Jets for the All Over Body Hydro-Massage
- Sculpted Arm Rest
- Optional Distinctive Fill Spout
- Cable Operated Drain in Color-Match, Chrome, Everbrass (PVD) or Brushed Nickel
- Powerful 2 HP Pump System Creates an Invigorating Whirlpool Action
- Dual Air Controls for the Ultimate Jet Power Control
- Two Contoured Pillows in Your Choice of White, Bone or Biscuit
- Trim Finish in Your Choice of Color-Match, Chrome, Everbrass (PVD) and Brushed Nickel
- Outstanding Protection – Mansfield® Limited Ten Year Warranty
- Available in White, Standard, Premium and Designer Colors (Consult Price Book for Specific Colors)

## Model Numbers

Order No.	Description	Approx. Wt.
5061	60" x 60" x 22" Corner whirlpool w/spout. Specify color and options when ordering.	130 lbs. (59 kg)
5062	60" x 60" x 22" Corner whirlpool w/o spout. Specify color and options when ordering.	130 lbs. (59 kg)
5561	60" x 60" x 22" Corner bath w/spout. Specify color and options when ordering.	120 lbs. (54 kg)
5562	60" x 60" x 22" Corner bath w/o spout. Specify color and options when ordering.	120 lbs. (54 kg)
SW1210	Luxury package	2 lbs. (1 kg)
SPA150	Factory installed nailing flange	2 lbs. (1 kg)
SWA215	Anti-microbial acrylic (White, Bone or Biscuit)	



### Corner Whirlpool

## Features and Upgrades

#### Micro Directional Jets

Four micro jets, adjustable in both direction and intensity, allows you to control your total hydromassage experience. Available in Color-Match, Chrome, Everbrass (PVD) or Brushed Nickel.





#### Luxury Package

A SimpleSelect™ control, solid state-of-the-art, four function control with LCD display. Controls on/off, ten-speed pump, massage action, and MoodScape™ light. Package includes the solid state in-line heater and MoodScape™ light.





#### Stacked Back Jets

Four lumbar directional jets and two spinning lumbar jets at each end give the user(s) the best in hydro-therapy.

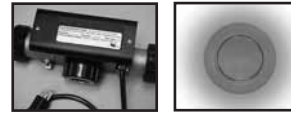

## Technical Information

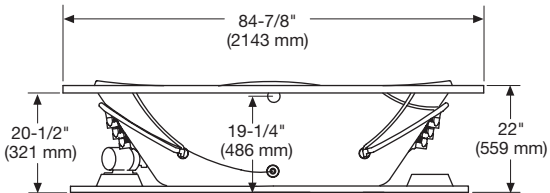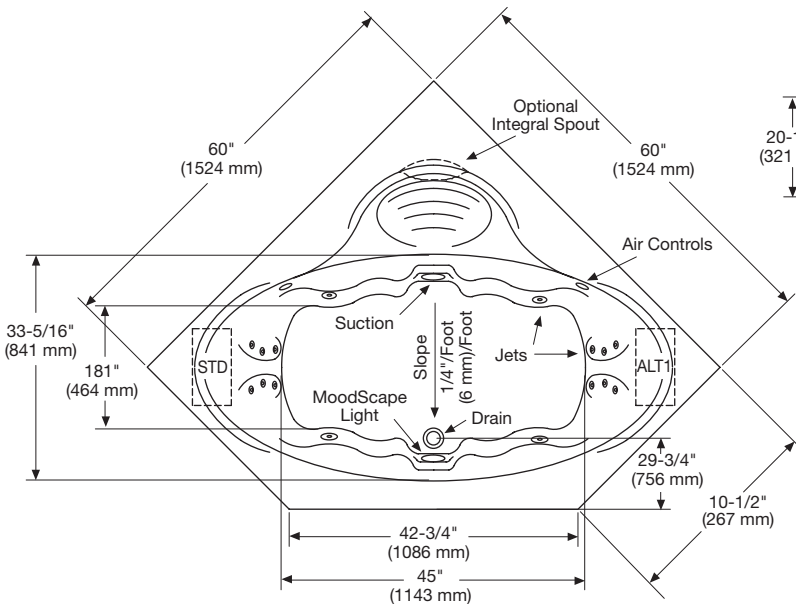

Pump locations are shown for clarity. STD-standard pump location. ALT1-alternate pump location. If a factory installed nailing flange is added to a unit, add 1/8" to each side flanged.

Note: Rough-in measurements may vary 1/4" (6.4 mm ±).

#### Specifications

Dimensions 60" x 60" x 22"  
 Material Acrylic, fiberglass reinforced  
 Construction Self-contained, pre-plumbed whirlpool bath with heat-bent rigid PVC pipe, mounted on a pre-leveled thermoformed, drip pan base  
 Pump Motor 2 HP, variable speed, 120 volt, 60 HZ  
 Electrical Requirements Two separate 120 volt, 20 AMP, GFCI outlets

Number of Jets Sixteen  
 Air Volume Control Two  
 Water Capacity 70 gal. max., 50 gal. min. (265 liters/189 liters)  
 Floor Loading 47 lbs./sq. ft. (229 kg/m<sup>2</sup>)  
 Shipping Weight 168 lbs. (76 kg)  
 Warranty Limited Ten Year

These dimensions are nominal and are subject to change without prior notice.

When tested for compliance to the requirement of ANSI A112.19.7M and A112.19.8M for "Whirlpool Bath Appliances" and ANSI Z124 for "Plastic Bathtub Units" the tested units are found to comply and are acceptable for listing under the Terralab Engineers, Inc. follow-up service. Listed Number 15197.

Certified for permanent electrical supply connection only.



Mansfield® Plumbing Products LLC • Sales Services Toll Free 800-999-1459 • Fax 903-657-3450  
 Website: [www.mansfieldplumbing.com](http://www.mansfieldplumbing.com) • Email: [custserv@mansfieldplumbing.com](mailto:custserv@mansfieldplumbing.com)